


Acura o2 simulator installation instructions.

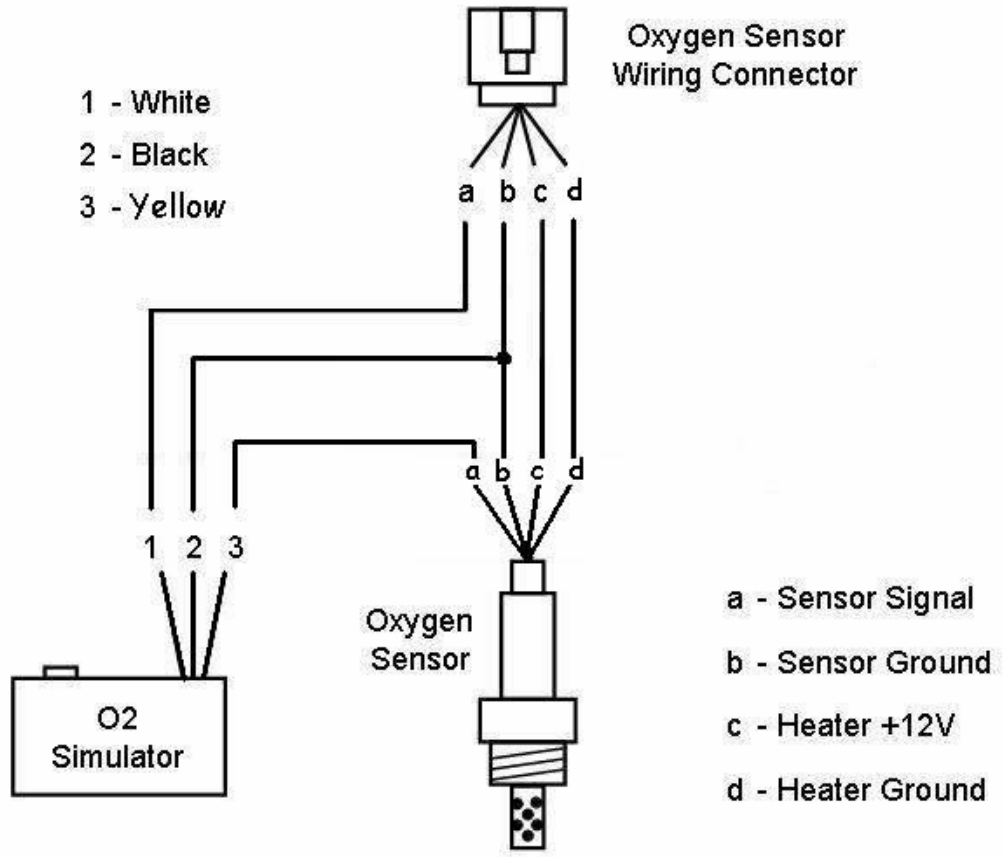

1. Locate secondary o2 sensor.

2. Establish which o2 sensor wires are Signal and Ground. User factory service manual for reference. You can find car connector color coding in Wire color coding section. Check Make/Model reference for car specific installation.

3. Verify Ground wire by measuring resistance or continuity test between wire and chassis. The resistance should be around 4ohms or less.

4. Disconnect Negative battery terminal to avoid damaging vehicle electric system.

5. Connect o2 simulator Black wire to o2 sensor Ground. *Recommendation: connect wires by using insulated crimps or soldering and using appropriate insulation, electrical tape or heat-shrinking tubing.*

6. Cut (do not just splice) the o2 sensor Signal wire and connect the car end (not the side goes to the sensor) to o2 simulator White wire.

7. Connect the other side (o2sensor side) of the Signal wire to o2 simulator Yellow or Orange wire.